





# High Density Cooling MAX-AIR™

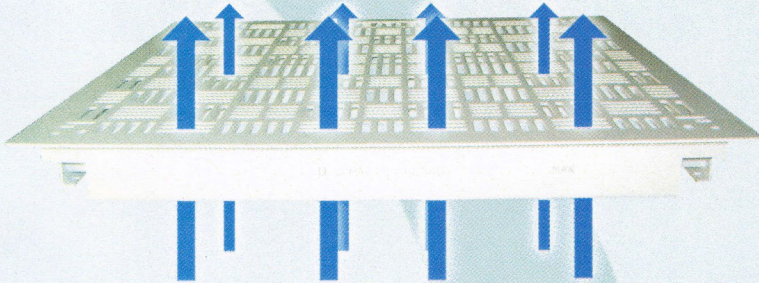

Patented Universal Design  
Adapts without tools  
Delivers 7' Cold Air Plume  
Improved *PUE*

## High Density Cooling Closer to the Rack 66% High Volume Air Flow

**MAX-AIR** delivers 15% more cool air volume than the Infinity standard (55%) model and weighs under 28 LBS making it one of the lightest, easiest panels to manage in the data center. **MAX-AIR's** new enhanced slot design allows greater air volume transfer and cooling effectiveness closer to the rack. Optimal supply air temperatures to Lo-Mid-Hi server inlets improves energy efficiency and equipment reliability.

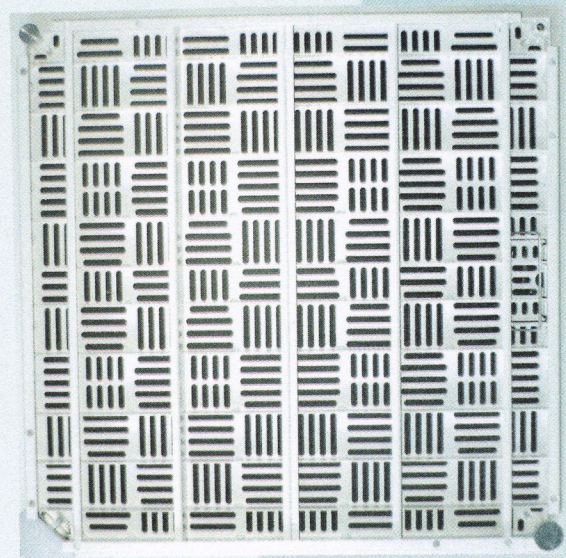

### AIRFLOW CONTROL ACCESSORIES

**Quad Damper Kit** (control range 10 CFM– 1950 CFM)

**FLEX-AIR Intake Hood** (restore positive airflow to servers)

#### Infinity® Performance Characteristics \*\*

U.S. Patents: No. 7,823,340 No. D561,327

Steel Panel (epoxy finish)	Understructure (wood/steel)	Panel Weight	Design Load	Safety Factor	Ultimate Load	Rolling Load	CFM (.10" H <sub>2</sub> O)	Open Area*
<b>MAX-AIR™</b>	ANY	6.75 lbs /ft <sup>2</sup>	1300 lbs	>3	4000 lbs	850 lbs	1300	66%
<b>AIRSTREAM™</b>	ANY	7.0 lbs /ft <sup>2</sup>	1500 lbs	>3	5000 lbs	1000 lbs	1100	55%

\* percentage of available open area

\*\* Load performance tests are in accordance with CISCA's recommended test procedures

Infinity® Air Grate

For Sales and Installation, contact:



(800) 328-2256 • www.dataclean.com